

EZ STOP® SHOCK ABSORBING LANYARDS


DBI/SALA's EZ STOP® Series Shock Absorbing Lanyards are specifically designed to limit the forces imposed on a worker during a fall (to 900 lbs or less) to reduce the possibility of injury or death. All lanyards feature a patented one-hand operated self-locking snap hooks (SLSH). Available in different lengths (elastic, fixed or adjustable), materials (rope, web or cable) and with different hook types. Meets or exceeds industry standards: ANSI Z359.1-1992, ANSI A10.14-1991, OSHA 1910.66, and OSHA 1926.502. CSA certified models available (Ref. Z259.11-M92).

EZ STOP® II SHOCK ABSORBING LANYARDS

- | | |
|---|-------------|
| A. SHOCK WAVE2™ Expands to 6ft when taut and contracts to 4.5 ft keeping out of the workers way. SLSH at each end | No. 1224306 |
| B. 1" Polyester Web, SLSH at each end x 6' | No. 1220006 |
| Same with SLSHs one end, D-Ring other end (19.5" long) | No. 1220362 |
| Adjustable 1" Polyester Web, SLSH at each end x 6' | No. 1220256 |
| C. 100% Tie-Off, 1", SLSH at end and leg ends x 6' | No. 1220406 |

EZ STOP® III SHOCK ABSORBING LANYARD


- | | |
|--|-------------|
| D. 1-3/8" Poly Core/Cover with Tubular Web Jacket. SLSH at each end x 6' | No. 1224006 |
|--|-------------|

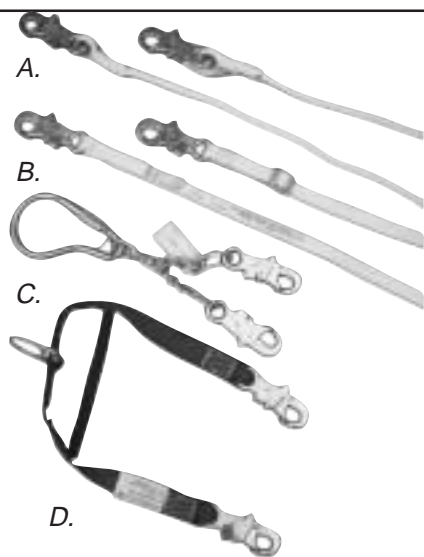

LANYARDS - ROPE AND WEB

Work positioning and restraint lanyards should only be used in applications that limit the free fall to two feet or less. Our web lanyards feature a built-in wear indicator alerting the user of excessive abrasion, available in nylon, polyester or Kevlar®. Meets or exceeds industry standards: ANSI A10.14-1991 and OSHA requirements. CSA certified models available (Ref. Z259.1-1976).

- | | |
|--|-------------|
| A. Rope Lanyard, ½", Nylon, SLSH at each end x 6' | No. 1202354 |
| Rope Lanyard, same as above with adjustable length | No. 1202209 |
| B. Web Lanyard, 1" poly, SLSH at each end x 6' adjustable length | No. 1201016 |
| C. Chain Rebar Assembly, SLSH each end, SH108 Carabiner with Swivel in Center, 22" | No. 5900101 |
| Web Rebar Assembly - Same as Above with Web Construction | No. 1201382 |
| D. Y-Lanyard, 1¾" Poly Web, SLSH both ends and D-Ring Center (Y-Line) x 2' | No. 1201470 |
| Same as 3797DP2 except with Spreader Bar (as shown) | No. 1201460 |

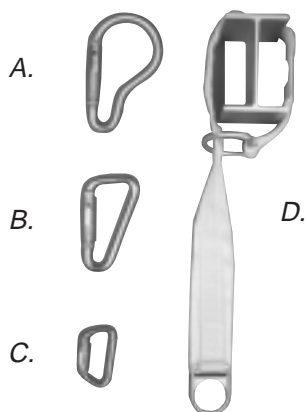

ACCESSORIES

- | | |
|---|-------------|
| A. Steel Carabiner, Self-Closing/Locking Gate - 2" Opening | No. 2000108 |
| B. Steel Carabiner, Self-Closing/Locking Gate 1 - 3/16" Opening | No. 2000106 |
| C. Steel Carabiner, Self-Closing/Locking Gate - ¾" Opening | No. 2000523 |
| D. Tie-Off Adaptor, 1¾" Polyester Strength Member, 3" Wide Polyester Wear Pad | No. 1003000 |
| E. Boatswain's Chair with Tongue Buckle (specify waist size) | No. 1001134 |